

SPEEDMASTER-DISPLAY

Professional Display System



*Industrial – Design,
easy to set-up, no adjustments,
just “plug and play”*

CE


Key Features

- *Industrial design*
- *Compatible with standard stage equipment*
- *Bright LED design – designed for out-door performance*
- *No adjustments required – plug and play*


Technical Data

	SPEEDMASTER 1503	SPEEDMASTER 1505
LED Digit height	150 mm	150 mm
Number of digits	3 digits	5 digits
Readability distance	75 m	75 m
Housing (H x W x D)	238 x 470 x 54 mm	238 x 695 x 54 mm
Degree of protection	IP 54	IP 54
Com-Port to Sensor	RS 485	RS 485
Com-Port optional	RS 232	RS 232
Operating voltage	100 to 240 VAC	100 to 240 VAC
Tripod for display	included	included
Power cord Euro - Style	2 m included	2 m included
Sensor cable (M8 – M8)	10 m included	10 m included

● Display for SPEEDMASTER 1503

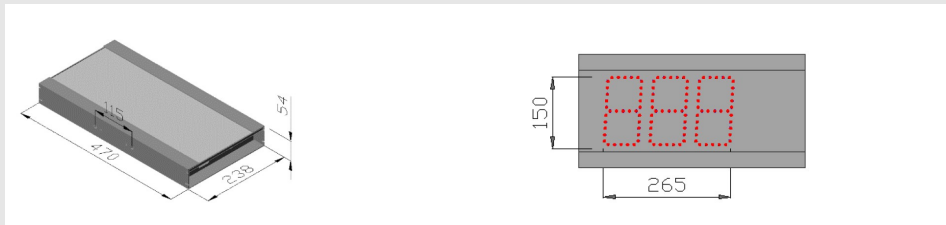

● Display for SPEEDMASTER 1505

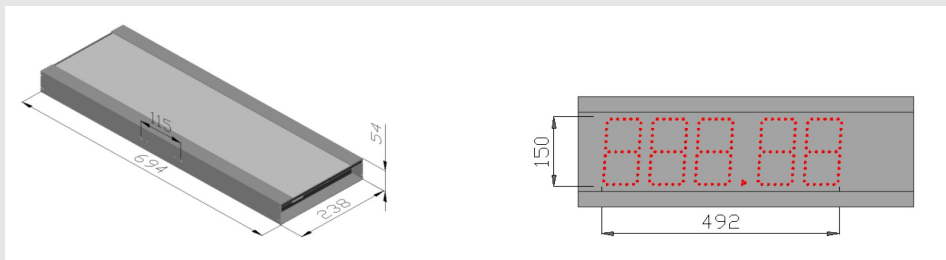

PART NUMBER: DS.DISPLAY.EN.071719

• CONTACT: GUY PAQUAY | Directeur Général | +32 (0)498.97.45.95 | gpaquay@speed-master.be